

CALEFACTIO MEGA / BV125

SUBMITTAL DATA

PROJECT

Job Name: _____
 Location: _____
 Engineer: _____
 Contractor: _____
 Sales Rep.: _____


Submitted by: _____ Date: _____
 Approved by: _____ Date: _____
 Order No.: _____ Date: _____
 Notes: _____

DESCRIPTION

Headers inlet/outlet: 1 1/4"

Headers are offered in 14 models (2 to 15 loops) with a maximum flowrate of 30 gallons per minute (GPM). They come in pair and the kit includes stainless steel supply and return headers, isolating valve, wall support, flowmeter, surface thermometer (0-80°C), air purger and drain. The integrated flowmeters allow the user to adjust the flow easily in each loop. Circuit isolation valves are also compatible with 24V actuators from Calefactio (#AC24VNC). Calefactio's stainless steel manifold kit is delivered pre-assembled and ready to install.

Model#*	Loops	Maximum Flow Rate		A		B		Weight	
		LPM	GPM	in	mm	in	mm	lb	kg
MAN2-M150SS-BV125	2	15,8	4	5.5	140	11.2	285	8.7	4.0
MAN3-M150SS-BV125	3	23.7	6	7.5	190	13.2	335	9.8	4.4
MAN4-M150SS-BV125	4	31.6	8	9.5	240	15.2	385	10.9	4.9
MAN5-M150SS-BV125	5	39.5	10	11.4	290	17.1	435	11.9	5.4
MAN6-M150SS-BV125	6	47.4	12	13.4	340	19.1	485	13.0	5.9
MAN7-M150SS-BV125	7	55.3	14	15.4	390	21.1	535	14.1	6.4
MAN8-M150SS-BV125	8	63.2	16	17.3	440	23.0	585	15.2	6.9
MAN9-M150SS-BV125	9	71.1	18	19.3	490	25.0	635	16.2	7.3
MAN10-M150SS-BV125	10	79	20	21.3	540	27.0	685	17.3	7.8
MAN11-M150SS-BV125	11	86.9	22	23.2	590	29.0	735	18.4	8.3
MAN12-M150SS-BV125	12	94.8	24	25.2	640	30.9	785	19.4	8.8
MAN13-M150SS-BV125	13	102.7	26	27.2	690	32.9	835	20.3	9.2
MAN14-M150SS-BV125	14	110.6	28	29.2	740	34.9	885	21.5	9.7
MAN15-M150SS-BV125	15	118.5	30	31.1	790	37	935	22.5	10,2

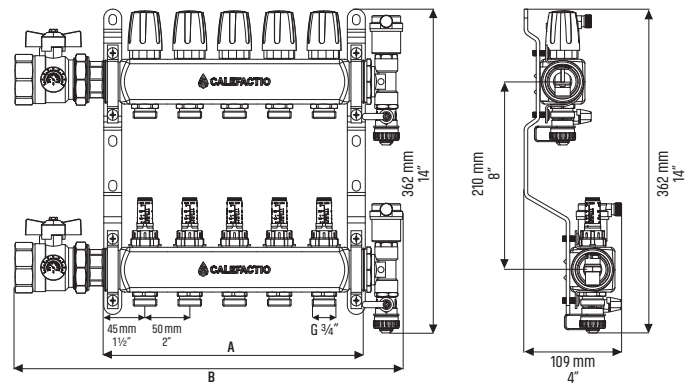

* Caltherm Mega's body is offered in 1 1/2 in. BV125 suffix means that it is connected to the system through a 1 1/4 in ball valve while suffix BV150 is connected to the system through a 1 1/2 in ball valve.

TYPICAL SPECIFICATIONS

Furnish and install a Caltherm Mega header of _____ loops, model MAN _____ -M150SS-BV125 from Calefactio. The header must be made of stainless steel and come with a drain and vent assembly as well as an isolating valve assembly equipped with surface thermometers. Circuit isolation valves must be compatible with Calefactio's actuator model (#AC24NC). The flow rate must be individually adjustable for each loop by rotating the balancing valve clockwise or counterclockwise and each circuit must be able to be isolated with the isolating valve. The manifolds must have 1 1/4" FNPT connections.

Quebec, Canada
 T (450) 951-0818
 F (450) 951-2165

CALEFACTIO.RADIANT.COM