



F1960 ELBOW SUBMITTAL DATA

Job Name: _____
 Location: _____
 Engineer: _____
 Contractor: _____
 Sales Rep.: _____

Submitted by: _____ Date: _____
 Approved by: _____ Date: _____
 Order No.: _____ Date: _____
 Notes: _____


#ELB-050 Quantity: _____ #ELB-075 Quantity: _____ #ELB-100 Quantity: _____
 #ELB-125 Quantity: _____ #ELB-150 Quantity: _____ #ELB-200 Quantity: _____

DESCRIPTION

Calefactio's PPSU elbows made of PPSU (polyphenylsulfone) are known for their durability, resistance to chemicals, and high-temperature tolerance, making them a reliable and cost-effective choice for various plumbing applications.

PRODUCT INFORMATION AND APPLICATION USE

F1960 PPSU fittings approved for sanitary installation's, and surface heating/cooling applications.

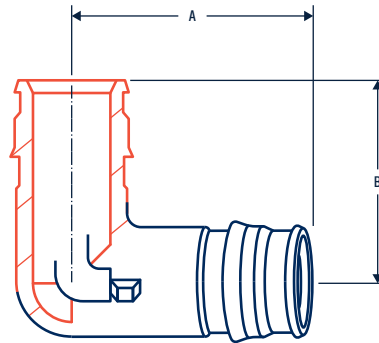

Standards

ASTM F1960

NSF/ANSI 14
NSF/ANSI/CAN 61
NSF/ANSI 372

CAN/CSA B137.5

TECHNICAL SPECIFICATIONS

- Material: PPSU (polyphenylsulfone)
- Max. Temperature (no pressure): 200°F (93°C) at 80 psi
- Max. Working temperature at pressure: 73°F (23°C) at 160 psi

Model#	Connection	A		B		Weight		Masterpack
		in	mm	in	mm	lb	kg	
ELB-050	PEX ½"	1.25	31.7	1.06	27	0.01	0,005	25
ELB-075	PEX ¾"	1.64	41.7	1.46	37.2	0.03	0,014	10
ELB-100	PEX 1"	2.05	52.1	1.83	46.5	0.05	0,023	10
ELB-125	PEX 1¼"	2.53	64.3	2.19	55.5	0.09	0,040	5
ELB-150	PEX 1½"	2.91	74	2.91	74	0.13	0,059	1
ELB-200	PEX 2"	3.76	95.5	3.76	95.5	0.38	0.172	1

TYPICAL SPECIFICATIONS

Furnish and install, as shown on the plan.

Quebec, Canada
T (450) 951-0818
F (450) 951-2165

CALEFACTIO RADIANT.COM